

Product DATASHEET

Personal Noise Dosimeters

Measure total sound exposure over an 8-hour period

Features


- Lightweight, and IEC 7
- Criterion Level
- Exchange Rate Per Workpla
- Frequency agenc
- 114dB c
- ation ch
- 114dB c
- ation ch
- 114dB c
- ation ch



Model 407355
 Storage
 Custom
 Durability



Specifications	(407354 & 407355)
Standards	Meets ANSI S1.25(1991) Type 2, ISO-1999, BS 402 (1983)
Range/Resolution	70 - 140 dBA / 0.1dB
Digital Display	LCD 0.01-9999%
Criterion Level	80, 84, 85, or 90dB
Exchange Rate	3, 4, 5 or 6 dB
Threshold Level	70-90 (1db steps)
Frequency weighting	A
Response Rate	Fast or Slow
High Level Detector/Peak Flag	115dB / 140dB
Dimensions/Weight:	4.2x2.5x1.3"(106x64x34mm) 8oz. (227g) incl.batteries
Microphone	1/2 inch electret condenser with 31" cable
	407354 407355
Battery Life	38 hrs 34 hrs
Event Storage	1 survey 5 surveys
RS232 Interface	no yes
Real time clock	no yes

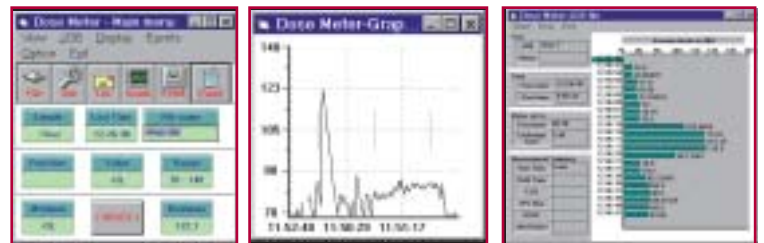

407355 Includes PC Windows® software to maintain records and statistically analyze acquired data

Ordering Information

- 407354Noise Dosimeter
- 407354-NIST ..Noise Dosimeter with NIST Certificate
- 407355Noise Dosimeter w/RS-232 Interface
- 407355-NIST ..Noise Dosimeter w/RS-232 Interface with NIST Certificate
- 40776694/114dB Sound Level Calibrator

EXTECH INSTRUMENTS CORPORATION
 285 Bear Hill Road, Waltham, MA 02451-1064, U.S.A.
 Phone: 781-890-7440 • FAX 781-890-7864

Make mine an Extech!
www.extech.com

